

INSTALLATION GUIDE



Product Name: RECEIVER FOR WIRELESS SENSOR

Product Code: N28-1010

Important Safety Information:

- Turn off and isolate the electrical supply before connecting this fitting to the building wires.
- Must be installed or connected by a licensed electrician.
- The luminaries are intended for indoor use only

Product Overview

The Wireless Receiver uses an advanced 2.4GHz RF chip, delivering stable performance and low power consumption.

The receiver works seamlessly with wireless sensor switches to provide lighting control, including dimming, colour adjustment, on/off switching, and sensor functions.

Its wire-free installation eliminates the need for complex wiring, making setup fast and straightforward.

Technical Specifications:


Operating Voltage: 12V

Transmitting frequency: 2.4GHz

Modulation mode: GFSK

Wireless receiving distance: Determined by the sensor

Installation Guide:

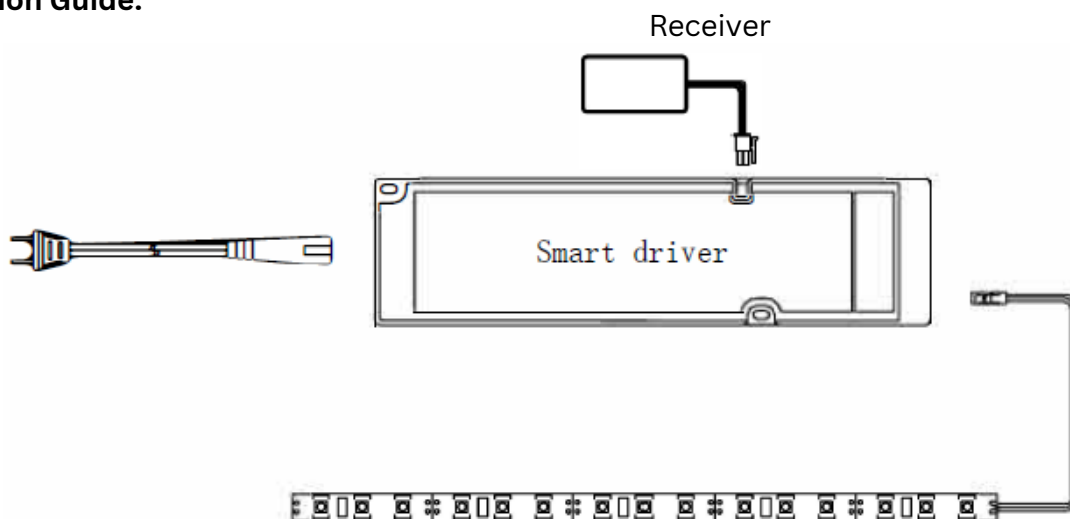

1. Connect the wireless receiver with the driver and connect the LED lights with the driver.
2. Refer to the code pairing process for the sensors



+44 (0) 1302 741941 | sales@tlwglobal.com | tlwglobal.com

TLW Global Brunel House, Brunel Close, Harworth, Doncaster, DN11 8QA

Product Name: RECEIVER FOR WIRELESS SENSOR

Product Code: N28-1010

Sensor Coding

1. Plug the receiver into the power set control port, connect the LED lights, the code operation can be performed within 30 seconds of the equipment power on. After the code is successful, the lights will flash 3 times to indicate the code success. To increasing the number of sensors turn the power off and on to code the next sensor code.

2. A single receiver supports a maximum of 8 different code values of the sensor code, more than 8 will overwrite the previous sensor code values.

Sensor Clear Code

When the receiver is powered on, press and hold both the code and clear code buttons on the sensor within five seconds to clear the pairing from the receiver. The connected lights will flash three times to confirm that the code has been successfully cleared.

After clearing, the sensor will no longer operate the receiver.

If more than five seconds have passed since powering on and the clearing process has not been completed, please switch the power off and on again, then repeat the code-clearing procedure.

Product Size:

