

INSTALLATION GUIDE

Product Name: Flexi-Sheet CCT

Product Code: K32-4924CCT



Applications

Suitable for a wide range of lighting applications, including:

- Home and residential lighting
- Decorative lighting
- Light boxes and display lighting
- Stage and entertainment lighting
- Retail and commercial displays
- General accent and auxiliary lighting

Technical Specifications

Optical Performance

- Luminous Flux: 3,800 lm/m
- LED Quantity: 484 LEDs
- Colour Temperature: 2700K to 6500K
- Colour Rendering Index (CRI): Ra >90
- Beam Angle: 120°
- Luminous Efficacy: 95 lm/W

Electrical Performance

- Input Voltage: 24V DC
- Current: 1.66A
- Power Consumption: 40W

General

- Operating Temperature: -20°C to +60°C
- Storage Temperature: -20°C to +60°C
- Expected Lifetime: Over 36,000 hours
- Warranty: 7 Years



+44 (0) 1302 741941 | sales@tlwglobal.com | tlwglobal.com

TLW Global Brunel House, Brunel Close, Harworth, Doncaster, DN11 8QA

INSTALLATION GUIDE

Product Name: Flexi-Sheet CCT



Product Code: K32-4924CCT

Installation Features


Can be cut every LED, allowing complete flexibility when creating bespoke lighting layouts.

Supplied with connection terminals for quick and straightforward installation.

Ultra-wide 245mm PCB design ensures uniform brightness across the entire board with virtually no voltage drop.

Large-format board simplifies installation by reducing the need for complex wiring.


Connecting sheets

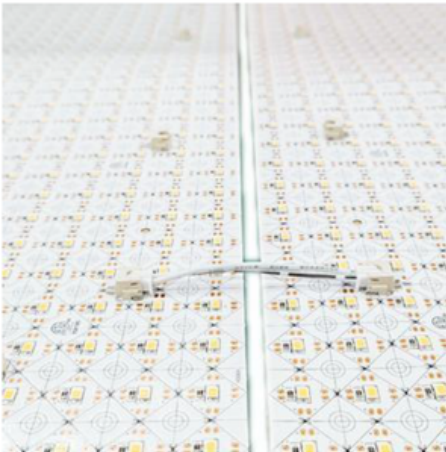


Kit Includes:

- Flexi-Sheet 490x 245mm
- 2 x 150mm Connector
- 2 x 50mm Connector
- Anti-collision spacers
- Fixing kit
- Power lead (Sold Separately)

Cutting

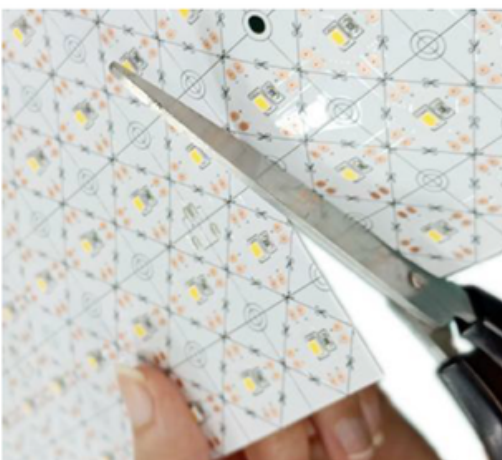

Cutting Unit:
22.3 x 22.3mm

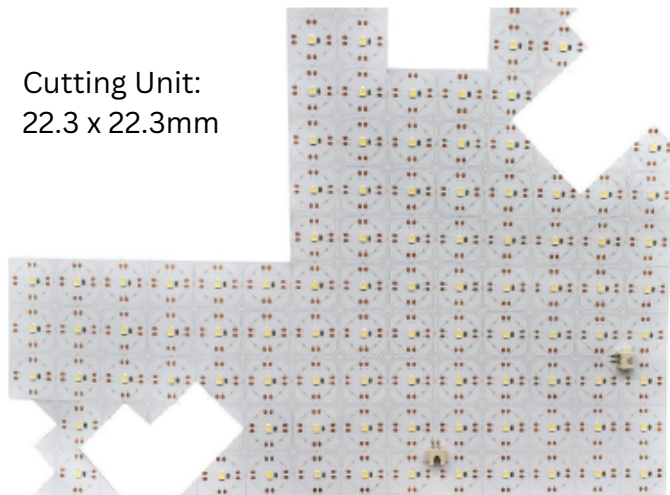


+44 (0) 1302 741941 | sales@tlwglobal.com | tlwglobal.com

TLW Global Brunel House, Brunel Close, Harworth, Doncaster, DN11 8QA

INSTALLATION GUIDE

Product Name: Flexi-Sheet CCT

Product Code: K32-4924CCT

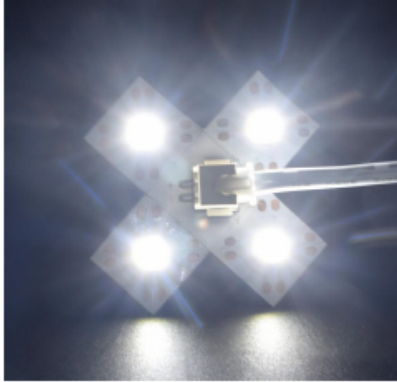

Connection Diagram

